
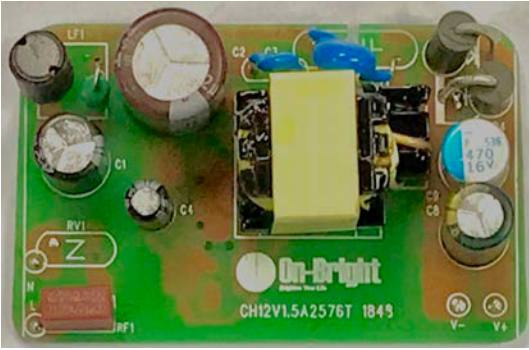


<p>Subject OB2576ALT Demo Board Manual</p>	<p>Board Model: CH12V1.5A0B2576ALT Doc. No.: OB_DOC_DBM_2576ALT00</p>
	<p>Key features:</p> <ul style="list-style-type: none"> • Standby power less than 75mW@264Vac • Precise CV/CC regulation • Primary-side sensing cc and cv regulation with TL431 and opto-coupler • Cost effective and simplified system design • Average efficiency meet DOE/COC • Audio noised free operation • Frequency shuffling technology to improve EMI performance • Meet EN55032 EMI & FCC Part 15 • Programmable input voltage Line OVP and Brownout protection

Schematic

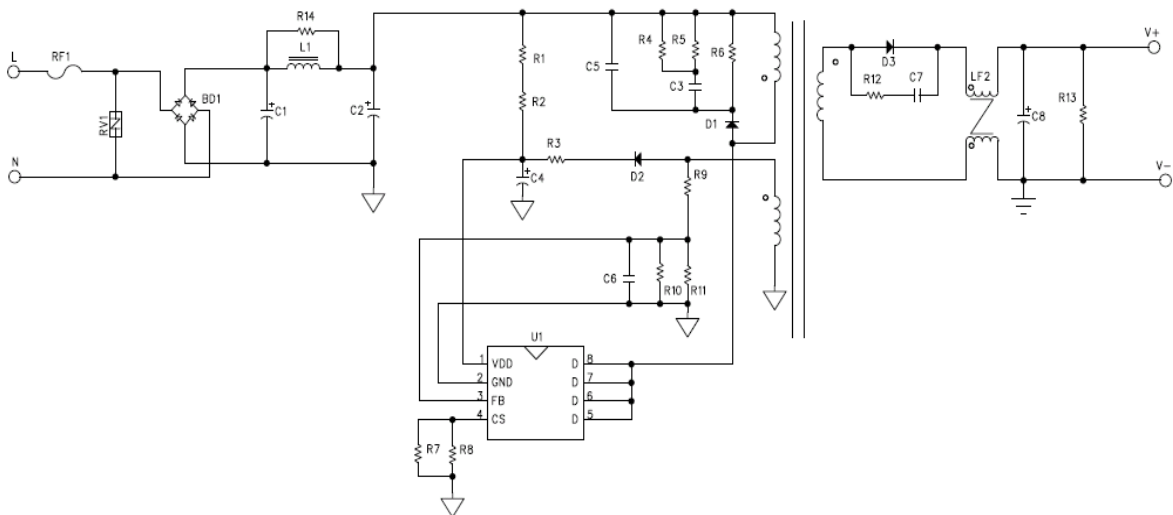

Performance Evaluation

This session presents the test results of OB2576ALT module up to date. Results on inrush current and safety test are not included and will be added when they become available.

Overall, the module meets design specifications. All data was measured at the end of 160ohm output cable.

Performance Highlights

- Standby power less than 75mW @264V
- Precise CV/CC regulation
- The average efficiency meet DOE Level 6/COC
- EMI passed EN55032 and FCC part 15 Class B test with more than 6dB margin
- Programmable input voltage Line OVP and Brownout protection

System Electrical Specification

Description	Symbol	Min	Typ.	Max	Units	Comment
Input Section						
Input Voltage	V_{IN}	90		264	V	2 Wire
Line Frequency	f_{LINE}	47	50/60	63	Hz	
Standby Power				75	mW	230V
Output characteristics						
CV Section	Output Voltage	V_{OUT_CV}	12		V	
	Output Current	I_{OUT_CV}	0	1.5	A	
CC Section	Output Voltage	V_{OUT_CC}	7.0		V	
	Output Current	I_{OUT_CC}	1.65	1.95	A	
Ripple & Noise	V_{RIPPLE}			150	mV _{P-P}	
Continuous Output Power	P_{OUT}		18		W	
Over Current Protection	I_{OUT_MAX}			1.95	A	
Active Mode Efficiency	η	85.45			%	Measured at Line End, $V_{IN}=115V/230V(COC)$
Time sequence						
Turn on delay time				2	s	
Environmental						
Conducted/Radiation EMI	Meets EN55032\FCC 15					
Safety	Meets IEC950,UL1950,Class II					
ESD		18			kV	

Test Equipments

Item	Vender	Module
AC Source	WEST	WEW1010
Digital Power Meter	YOKOGAWA	WT210
Electrical Load	Chroma	63030
Oscilloscope	LeCroy	WS424
Multimeter	VICTORY	VC9807A

1. Input Characteristics

1.1 Standby power

Table. 1 Standby power

Input voltage	Pin(mW)	Vo(V)	Specification	Test result
90V/60HZ	35.5	11.988	<75mW	Pass
115V/60HZ	37.8	12.007		
230V/50HZ	60.6	11.997		
264V/50HZ	70.8	12.003		

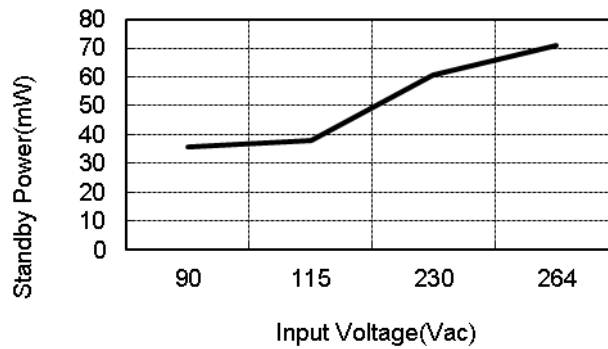


Fig. 1 Standby Power vs. Input Voltage

1.2 Efficiency

Table. 2 Efficiency Line end with 22# 1.5M (160mΩ) output line.

Input voltage	10%	25%	50%	75%	100%	25%~100% Load Aver. Eff.	Standards		Test Result
							DOE	COC	
115V/60Hz	82.38	86.02	87.24	87.21	86.54	86.92	85.0%	85.45%	Pass
230V/50Hz	79.13	84.73	86.20	86.61	86.42	86.00		75.45% (10%Load)	

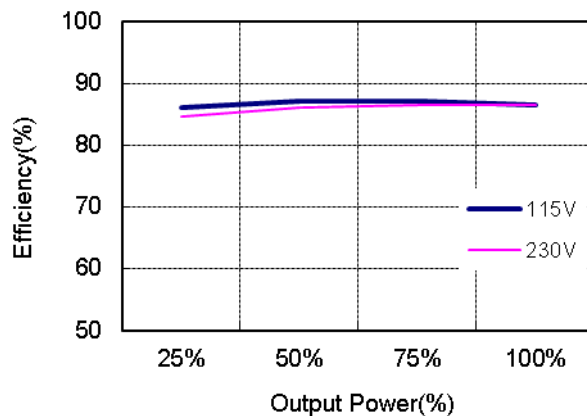


Fig. 2 Efficiency vs. Percent of Rated Output Power

2. Output Characteristics

2.1 Line Regulation & Load Regulation

Table. 3 Line Regulation & Load Regulation

Input voltage	No load(V)	Half load(V)	Full load(V)	Specification(V)	Test result
90V/60Hz	11.988	11.994	12.025	11.4-12.6	Pass
115V/60Hz	12.007	12.000	12.049	11.4-12.6	
230V/50Hz	11.997	11.992	12.074	11.4-12.6	
264V/50Hz	12.003	11.991	12.081	11.4-12.6	
Line Regulation	±0.23%			<±2%	Pass
Load Regulation	±0.32%			<±5%	Pass

2.2 Ripple & Noise

Table. 4 Ripple & Noise

Input voltage	R&N (mV)		
	No load	Full load	Remark
90V/60Hz	18mV	98mV	Fig. 3,4
115V/60Hz	18mV	75mV	
230V/50Hz	19mV	75mV	
264V/50Hz	19mV	77mV	Fig. 5,6

Note: Ripple&noise was measured at line end without probe cap and ground clip, meanwhile with ceramic cap 0.1uF/100V and electrolytic cap 10uF/50V. Measurement bandwidth was limited to 20MHz.

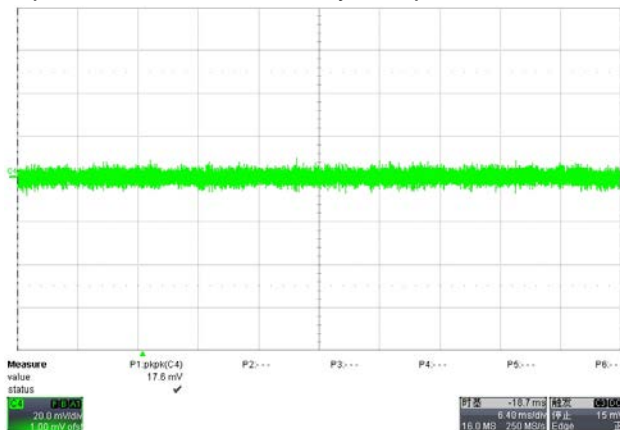


Fig. 3 Measured ripple& noise waveform@90V/60Hz, no load

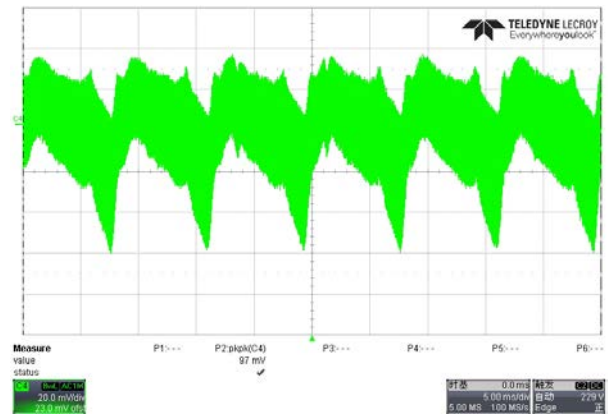


Fig. 4 Measured ripple& noise waveform@90V/60Hz, full load

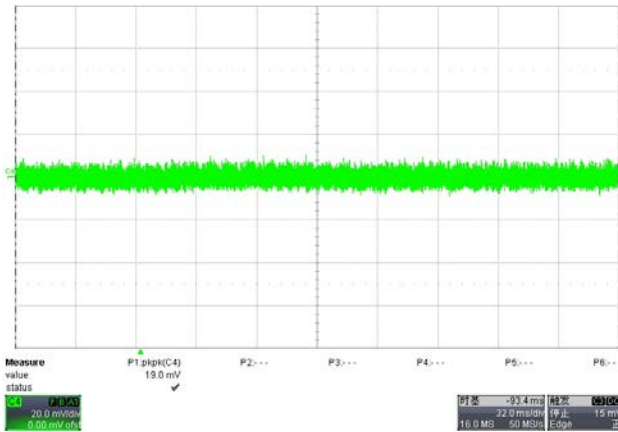


Fig. 5 Measured ripple & noise waveform @264V/50Hz, no load

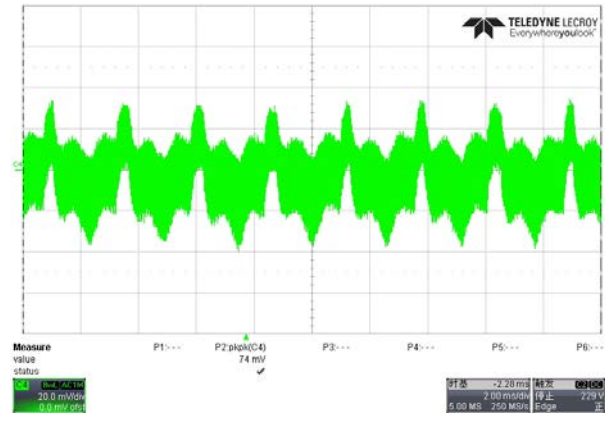


Fig. 6 Measured ripple & noise waveform @264V/50Hz, full load

2.3 Dynamic Test

A dynamic loading with low load lasting for 50ms/20ms and high load lasting for 50ms/20ms is added to output. The high load is 1.35A and the low load is 0.15A. The ramp is set at 0.125A/ μ s at transient. Measurement was taken at line end (Same as R&N measurement)

Table. 5 Output voltage under dynamic test (1.35A lasting for 50ms, 0.15A lasting for 50ms)

Input	Vomin-Vomax(v)	Remark
90V/60Hz	11.30-12.43	
115V/60Hz	11.31-12.44	
230V/50Hz	11.30-12.44	
264V/50Hz	11.31-12.45	

(1.35A lasting for 20ms, 0.15A lasting for 20ms)

Input	Vomin-Vomax(v)	Remark
90V/60Hz	11.47-12.42	
115V/60Hz	11.49-12.44	
230V/50Hz	11.50-12.45	
264V/50Hz	11.51-12.45	

2.4 Input voltage line ovp and brownout Test

Table. 6 Input voltage line ovp and brownout

	Input voltage	Remark
Line OVP	308Vac	Fig. 7
Brownout	69Vac	Fig. 8

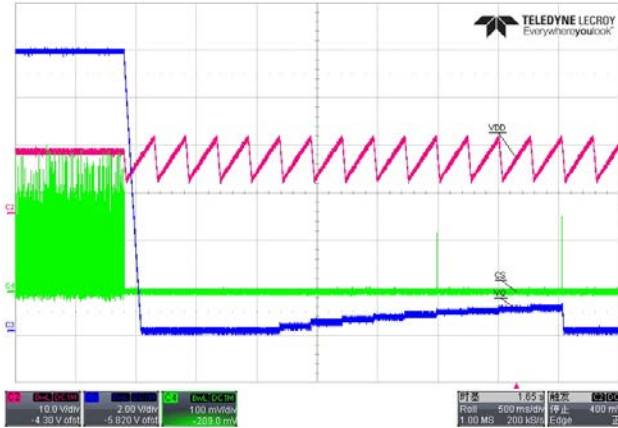


Fig. 7 Input Voltage > 308Vac Line OVP

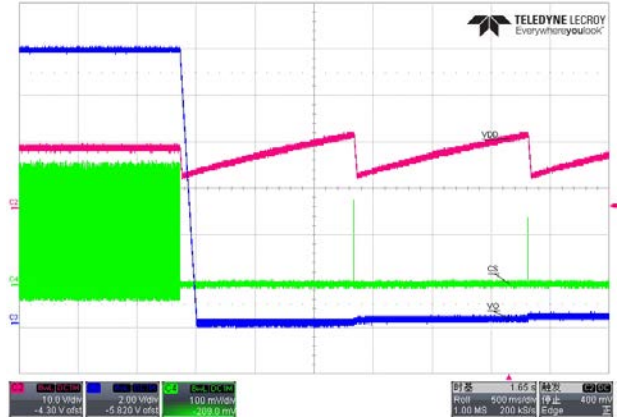



Fig. 8 Input Voltage < 69Vac Brownout

3. EMI Test


3.1 Conducted EMI Test

The Power supply passed EN55022 Class B and FCC 15 Class B EMI requirement with more than 6dB margin

EN55022 CLASS B @ full load report

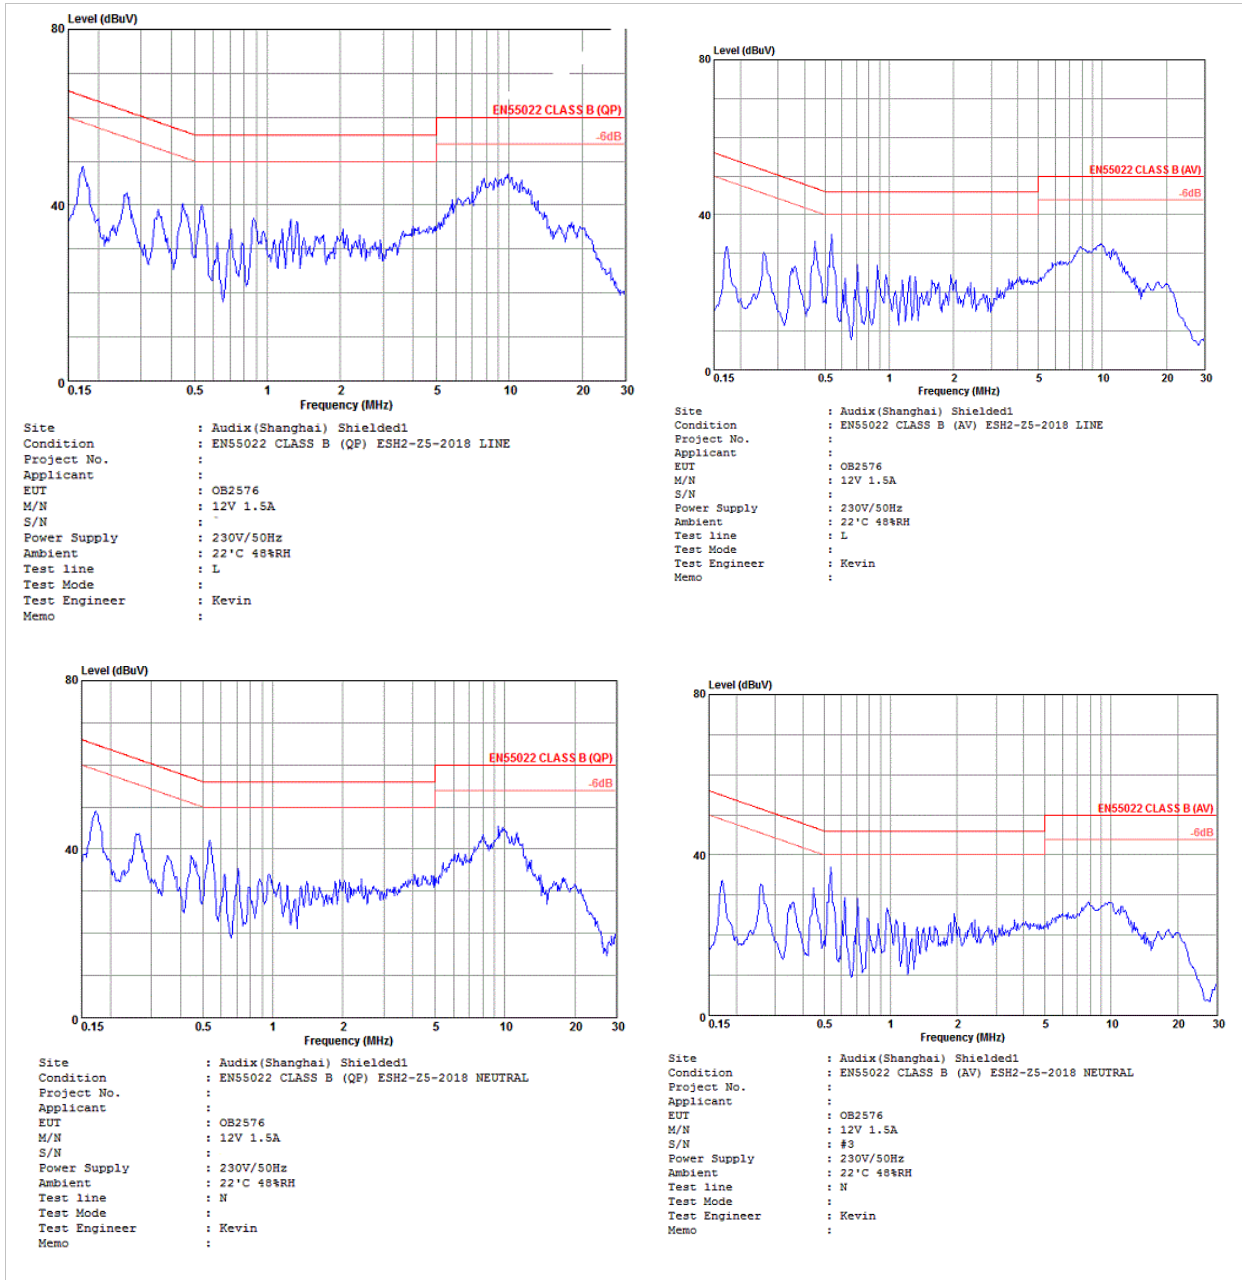


FCC 15 CLASS B @ full load report

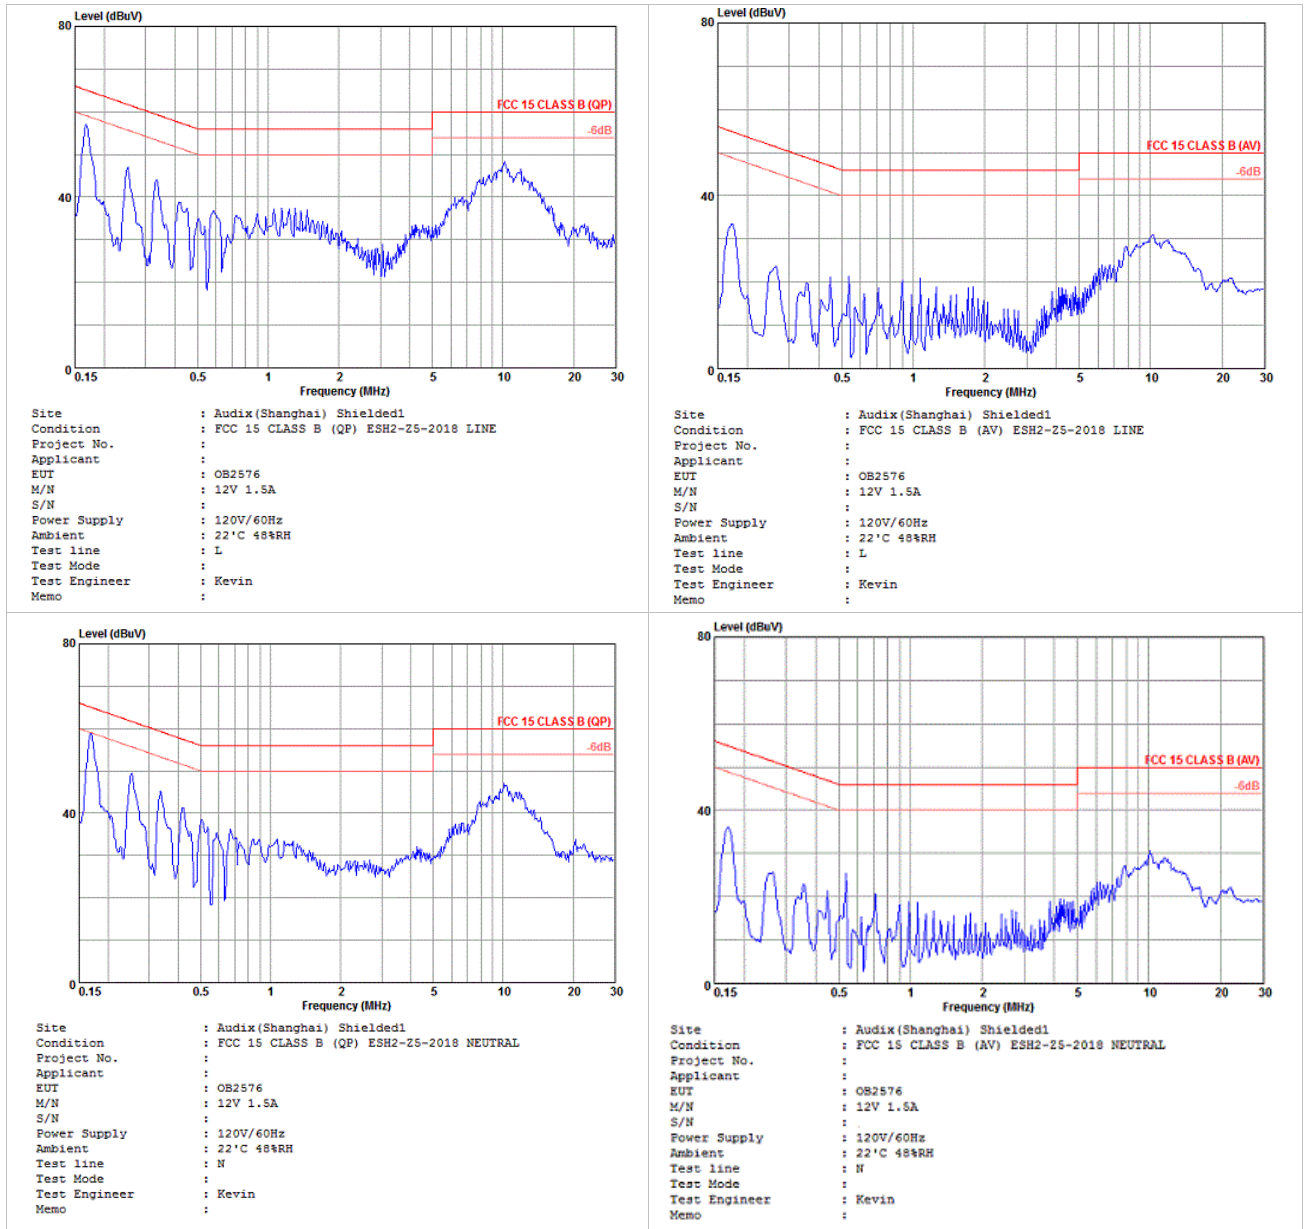


3.2 Radiation EMI Test

The Power supply passed EN55032 Class B and FCC part 15 Class B EMI requirement with more than 6dB margin

EN55032 CLASS B @ full load report

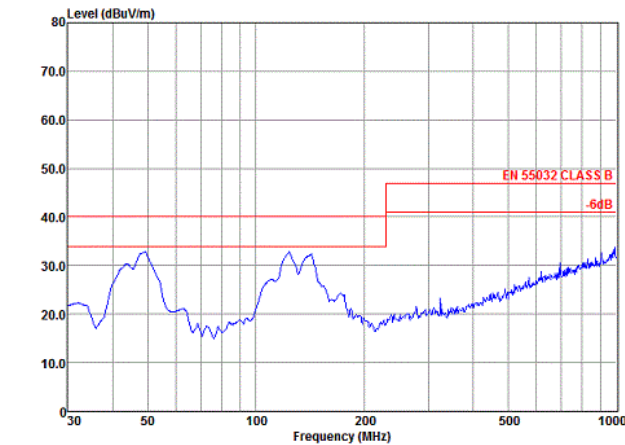


Site : Audix(Shanghai) Chamber3
 Condition : EN 55032 CLASS B VERTICAL
 Project No. :
 Applicant :
 EUT :
 M/N : OB2576
 S/N : 12V 1.5A
 Power Supply : 230V/50Hz
 Ambient : 22'C 60%RH
 Test Mode :
 Test Engineer: Larry
 Memo :

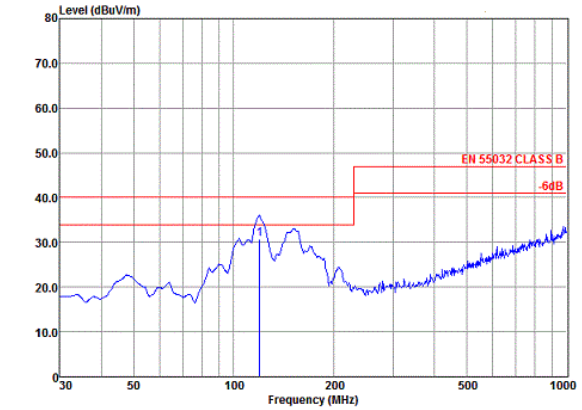


Site : Audix(Shanghai) Chamber3
 Condition : EN 55032 CLASS B HORIZONTAL
 Project No. :
 Applicant :
 EUT :
 M/N : OB2576
 S/N : 12V 1.5A
 Power Supply : 230V/50Hz
 Ambient : 22'C 60%RH
 Test Mode :
 Test Engineer: Larry
 Memo :

	Read Freq	CableAntenna Level	Preamp Loss Factor	Preamp Factor	Limit Line	Over Level	Limit Remark
	MHz	dBuV	dB	dB/m	dB	dBuV/m	dB
1	119.42	41.19	1.19	16.15	27.79	40.00	30.74 -9.26 QP

FCC part 15 CLASS B @ full load report

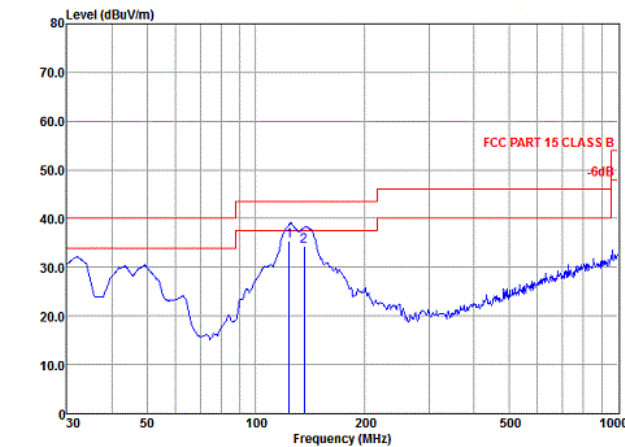

Site : Audix(Shanghai) Chamber3
 Condition : FCC PART 15 CLASS B VERTICAL
 Project No. :
 Applicant :
 EUT :
 M/N : OB2576
 S/N : 12V 1.5A
 Power Supply : 120V/60Hz
 Ambient : 22'C 60%RH
 Test Mode :
 Test Engineer: Larry
 Memo :

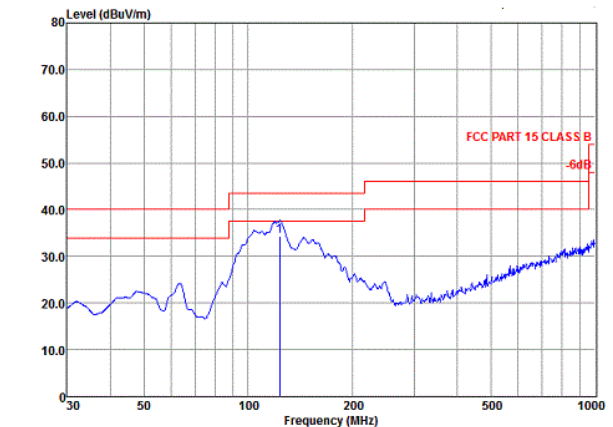

Site : Audix(Shanghai) Chamber3
 Condition : FCC PART 15 CLASS B HORIZONTAL
 Project No. :
 Applicant :
 EUT :
 M/N : OB2576
 S/N : 12V 1.5A
 Power Supply : 120V/60Hz
 Ambient : 22'C 60%RH
 Test Mode :
 Test Engineer: Larry
 Memo :

	Read Freq	CableAntenna Level	Preamp Loss Factor	Preamp Factor	Limit Line	Over Level	Limit Remark
	MHz	dBuV	dB	dB/m	dB	dBuV/m	dB
1	122.94	43.70	1.21	17.10	27.77	43.50	34.24 -9.26 QP

	Read Freq	CableAntenna Level	Preamp Loss Factor	Preamp Factor	Limit Line	Over Level	Limit Remark
	MHz	dBuV	dB	dB/m	dB	dBuV/m	dB
1	123.58	44.60	1.22	17.25	27.76	43.50	35.31 -8.19 QP
2	136.00	41.80	1.28	19.04	27.68	43.50	34.44 -9.06 QP

Disclaimer

On-Bright Electronics reserves the right to make corrections, modifications, enhancements, improvements, and other changes to its documents, products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete.

This document is under copy right protection. None of any part of document could be reproduced, modified without prior written approval from On-Bright Electronics.