

**Subject**  
**4-Strings LED Demo Board Manual**

Board Model: LDB30V0.64A3363T.00  
 Doc. No.: OB\_DOC\_DBM\_3363T00

**Description:**

The performance of LED backlight power supply for LCD monitor backlight application is presented. It is designed with OB3363T which integrates a boost converter and 4 channels of current source optimized to drive LED arrays. The detailed block diagram, schematic, BOM, PCB layout and test data are also described.

The test data in this report is by 10Series 4Parallel White LED array.

## Revision History


Revise Date	Version	Reason/Issue
2013-09-18	00	First Issue

## 1. Board Information

### 1.1. Features

- $\pm 3\%$  matching accuracy between 4 LED strings current (100% brightness)
- Up to 160mA current capability per string
- 10V gate drive, better MOS compatibility
- Programmable operating frequency
- Build in both PWM to Analog and Direct PWM dimming
- Comprehensive protections coverage covers output open, LED short /open, OVP, Diode/Inductor short, LEDX short to GND, OTP etc.

## 1.3. Electrical Schematic

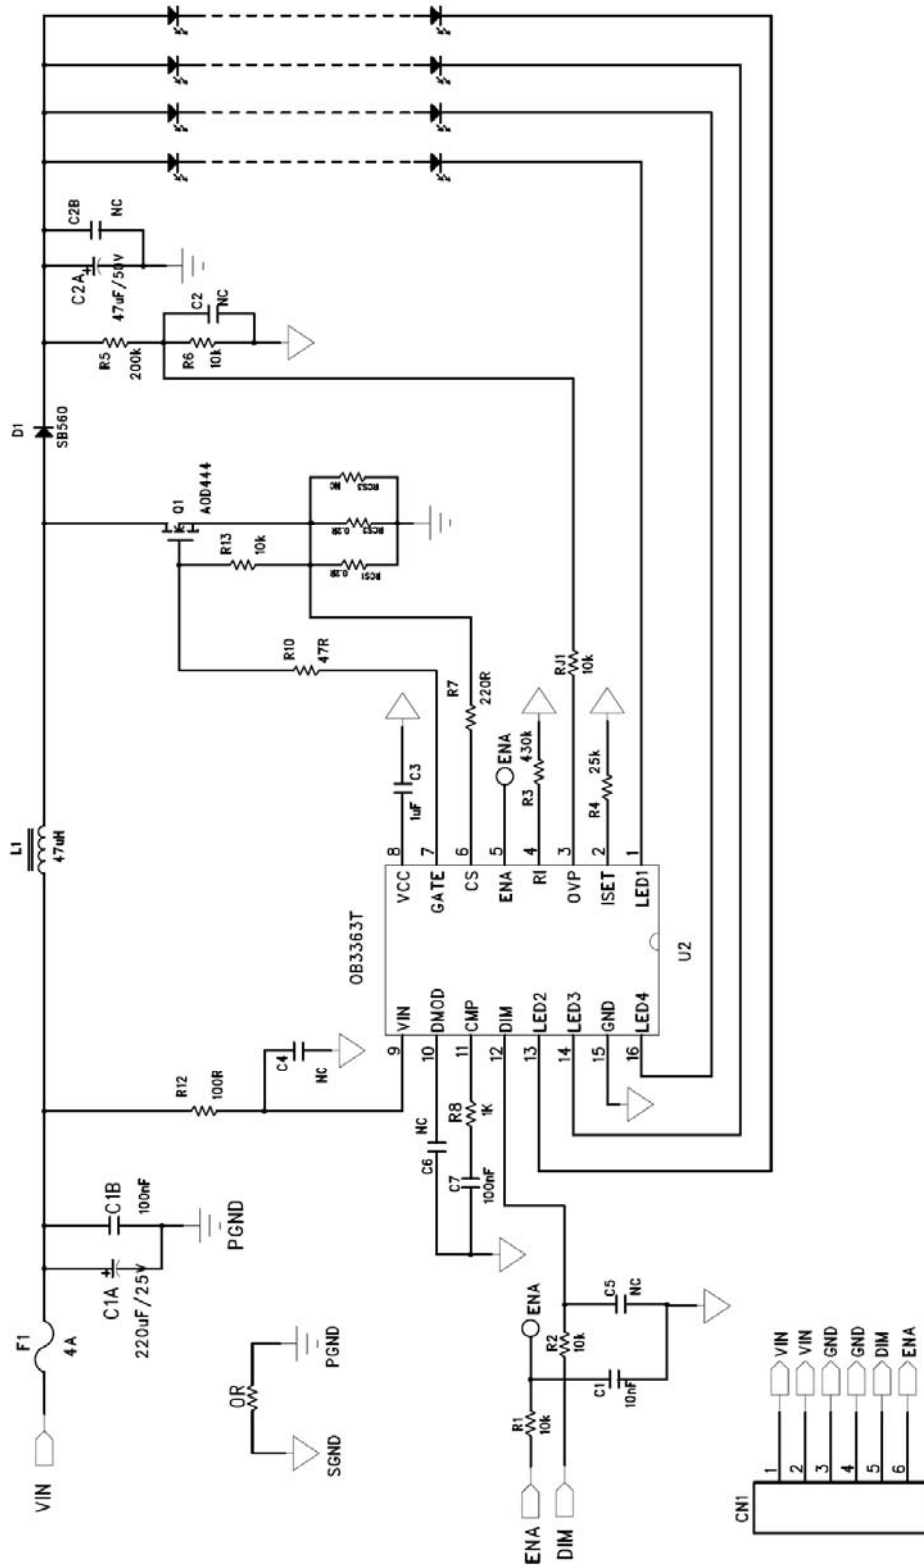

## 2. Test Data & Waveform

### 3.1 Test Data Summary

#### 3.1.1 Key Item Overview

Item	Symbol	Test result				Spec	Unit	Remark
		LED1	LED2	LED3	LED4			
LED Current	$I_{OUT}$	161.27	159.17	155.91	159.85	152-168	mA	Pass
LED Array voltage	$V_P$	28.88	29.37	28.95	29.76	30	V	--
LED Current Matching		1.69%				<3%		Pass
	$V_{IN}$ (V)	$I_{IN}$ (A)	$P_{IN}$ (W)	$P_{OUT}$ (W)	Efficiency	Spec		Remark
Efficiency	11.99	1.74	20.86	18.60	89.17%	>85%		Pass
	<b>L1 (Core)</b>		<b>Q1</b>		<b>U2 (OB3363T)</b>		<b>D1</b>	
Thermal	65.1°C		60.9°C		81.2°C <sup>①</sup>		56.9°C	

Note:  $V_{IN}=12V$ , under 25°C ambient with 10S4P white LED array.

### Disclaimer

On-Bright Electronics reserves the right to make corrections, modifications, enhancements, improvements, and other changes to its documents, products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete.

This document is under copy right protection. None of any part of document could be reproduced, modified without prior written approval from On-Bright Electronics.