


<p>Subject OB2573Y Demo Board Manual</p>	<p>Board Model: CH12V1.0AOB2573Y Doc. No.: OB_DOC_DBM_2573Y00</p>
	<p>Key features:</p> <ul style="list-style-type: none"> • Standby power less than 75mW@264Vac • Precise CV/CC regulation • Primary-side sensing cc and cv regulation with TL431 and opto-coupler • Cost effective and simplified system design • Average efficiency meet DOE/COC • Audio noised free operation • Frequency shuffling technology to improve EMI performance

Schematic

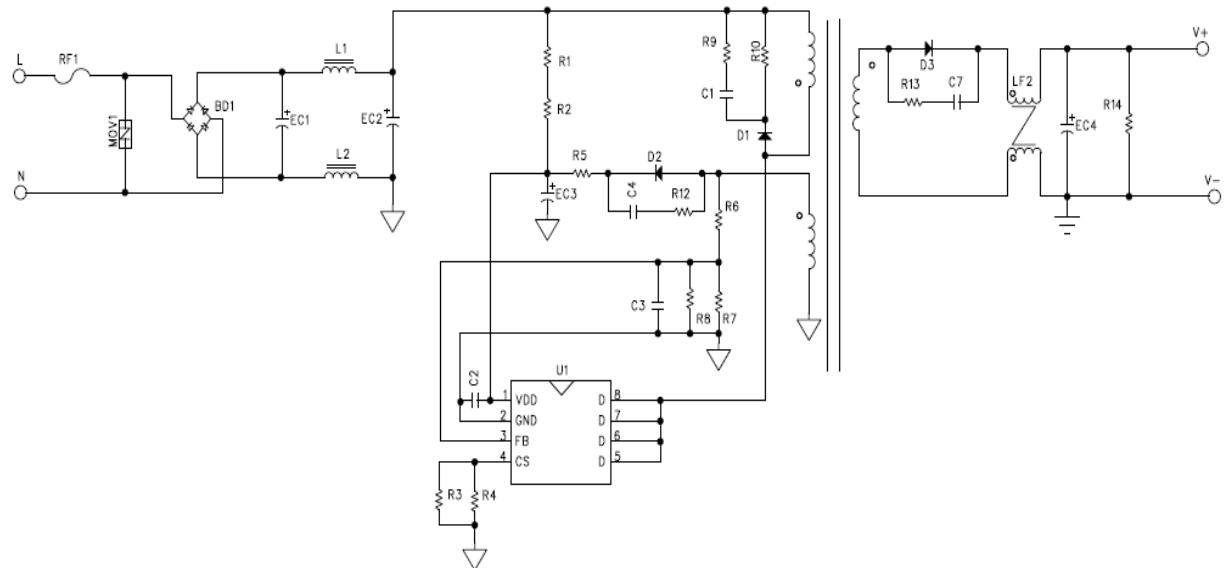

Performance Evaluation

This session presents the test results of OB2573Y module up to date. Results on inrush current and safety test are not included and will be added when they become available.

Overall, the module meets design specifications. All data was measured at the end of 160ohm output cable.

Performance Highlights

- Standby power less than 75mW@264V
- Precise CV/CC regulation
- The average efficiency meet DOE Level 6/COC
- EMI passed EN55022 and FCC15 Class B test with more than 6dB margin

System Electrical Specification

Description	Symbol	Min	Typ.	Max	Units	Comment
Input Section						
Input Voltage	V _{IN}	90		264	V	2 Wire
Line Frequency	f _{LINE}	47	50/60	63	Hz	
Standby Power				75	mW	230V
Output characteristics						
CV Section	Output Voltage	V _{OUT_CV}		12	V	
	Output Current	I _{OUT_CV}	0		A	
CC Section	Output Voltage	V _{OUT_CC}	6.0		V	
	Output Current	I _{OUT_CC}	1.15		A	
Ripple & Noise	V _{RIPPLE}			150	mV _{P-P}	
Continuous Output Power	P _{OUT}		12		W	
Over Current Protection	I _{OUT_MAX}			1.45	A	
Active Mode Efficiency	η	83.26			%	Measured at Line End, V _{IN} =115V/230V(COC)
Time sequence						
Turn on delay time				2	s	
Environmental						
Conducted/Radiation EMI	Meets EN55032\ FCC 15					
Safety	Meets IEC950,UL1950,Class II					
ESD		18			kV	

Test Equipments

Item	Vender	Module
AC Source	WEST	WEW1010
Digital Power Meter	YOKOGAWA	WT210
Electrical Load	Chroma	63030
Oscilloscope	LeCroy	WS424
Multimeter	VICTORY	VC9807A

1. Input Characteristics

1.1 Standby power

Table. 1 Standby power

Input voltage	Pin(mW)	Vo(V)	Specification	Test result
90V/60HZ	35.8	12.118	<75mW	Pass
115V/60HZ	37.2	12.099		
230V/50HZ	64.5	12.112		
264V/50HZ	73.4	12.095		

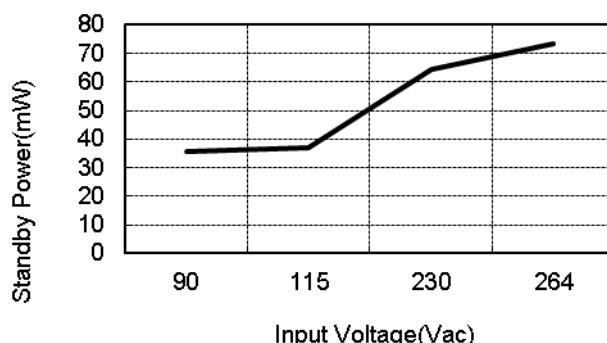


Fig. 1 Standby Power vs. Input Voltage

1.2 Efficiency

Table. 2 Efficiency Line end with 22# 1.5M (160mΩ) output line.

Input voltage	10%	25%	50%	75%	100%	25%~100% Load Aver. Eff.	Standards		Test Result
							DOE	COC	
115V/60Hz	78.02	83.05	84.45	84.82	85.02	84.33	82.96%	83.26%	Pass
230V/50Hz	77.01	82.66	84.34	84.65	84.88	84.13		73.26% (10%Load)	

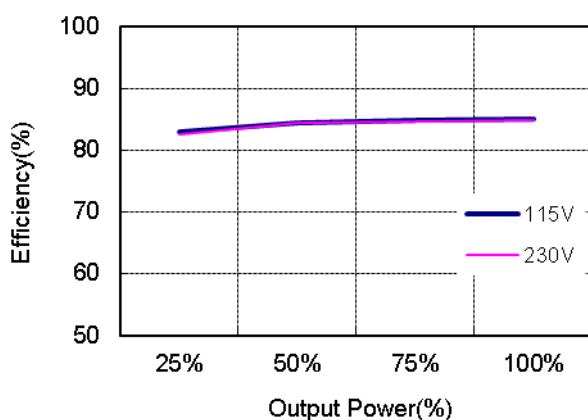


Fig. 2 Efficiency vs. Percent of Rated Output Power

2. Output Characteristics

2.1 Line Regulation & Load Regulation

Table. 3 Line Regulation & Load Regulation

Input voltage	No load(V)	Half load(V)	Full load(V)	Specification(V)	Test result
90V/60Hz	12.118	12.020	11.990	11.4-12.6	Pass
115V/60Hz	12.099	12.025	11.993	11.4-12.6	
230V/50Hz	12.112	11.992	11.990	11.4-12.6	
264V/50Hz	12.095	11.989	11.899	11.4-12.6	
Line Regulation	$\pm 0.13\%$			< $\pm 2\%$	Pass
Load Regulation	$\pm 0.53\%$			< $\pm 5\%$	Pass

2.2 Ripple & Noise

Table. 4 Ripple & Noise

Input voltage	R&N (mV)		
	No load	Full load	Remark
90V/60Hz	10mV	117mV	Fig. 3,4
115V/60Hz	12mV	64mV	
230V/50Hz	12mV	80mV	
264V/50Hz	13mV	82mV	Fig. 5,6

Note: Ripple&noise was measured at line end without probe cap and ground clip, meanwhile with ceramic cap 0.1uF/100V and electrolytic cap 10uF/50V. Measurement bandwidth was limited to 20MHz.

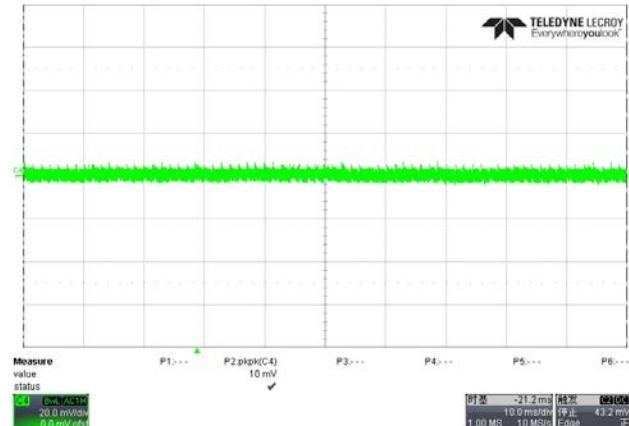


Fig. 3 Measured ripple& noise waveform@90V/60Hz, no load

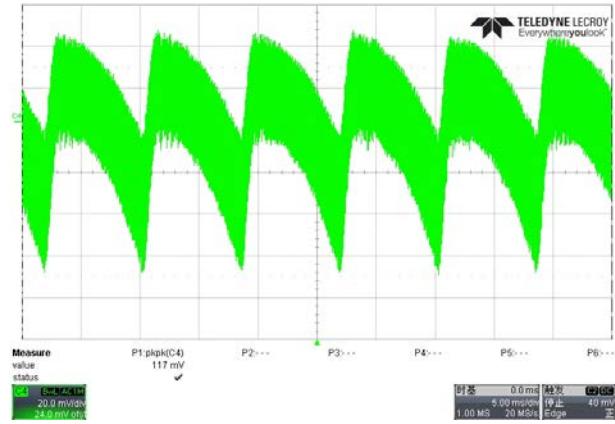


Fig. 4 Measured ripple& noise waveform@90V/60Hz, full load

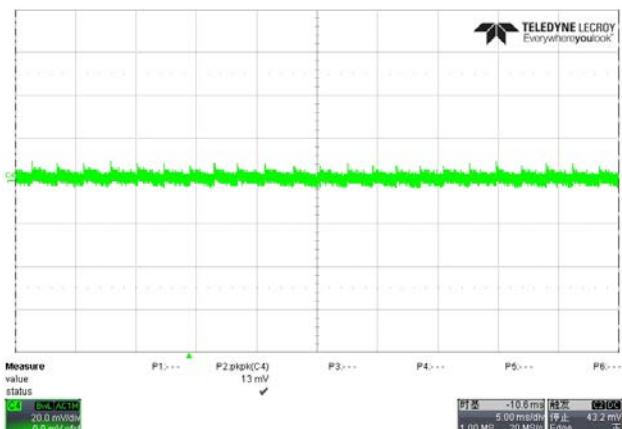


Fig. 5 Measured ripple& noise waveform@264V/50Hz, no load

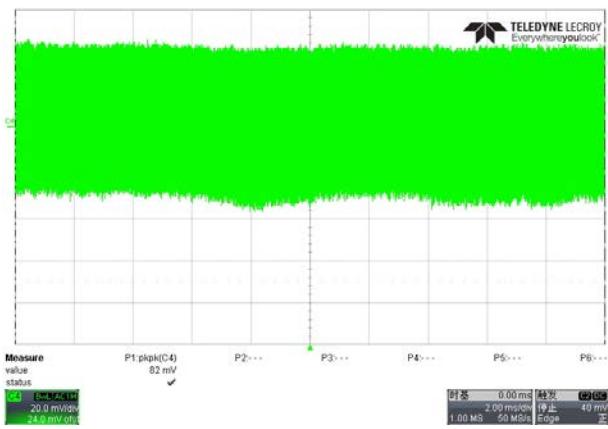


Fig. 6 Measured ripple& noise waveform@264V/50Hz, full load

2.3 Dynamic Test

A dynamic loading with low load lasting for 10ms/20ms and high load lasting for 10ms/20ms is added to output. The high load is 1A and the low load is 0A. The ramp is set at 0.125A/ μ s at transient. Measurement was taken at line end (Same as R&N measurement)

Table. 5 Output voltage under dynamic test (1A lasting for 10ms, 0A lasting for 10ms)

Input	Vomin-Vomax(v)	Remark
90V/60Hz	11.45-12.58	
115V/60Hz	11.38-12.58	
230V/50Hz	11.38-12.65	
264V/50Hz	11.38-12.65	


(1A lasting for 20ms, 0A lasting for 20ms)

Input	Vomin-Vomax(v)	Remark
90V/60Hz	11.38-12.58	
115V/60Hz	11.25-12.51	
230V/50Hz	11.32-12.65	
264V/50Hz	11.32-12.65	


3. EMI Test

3.1 Conducted EMI Test


The Power supply passed EN55022 Class B

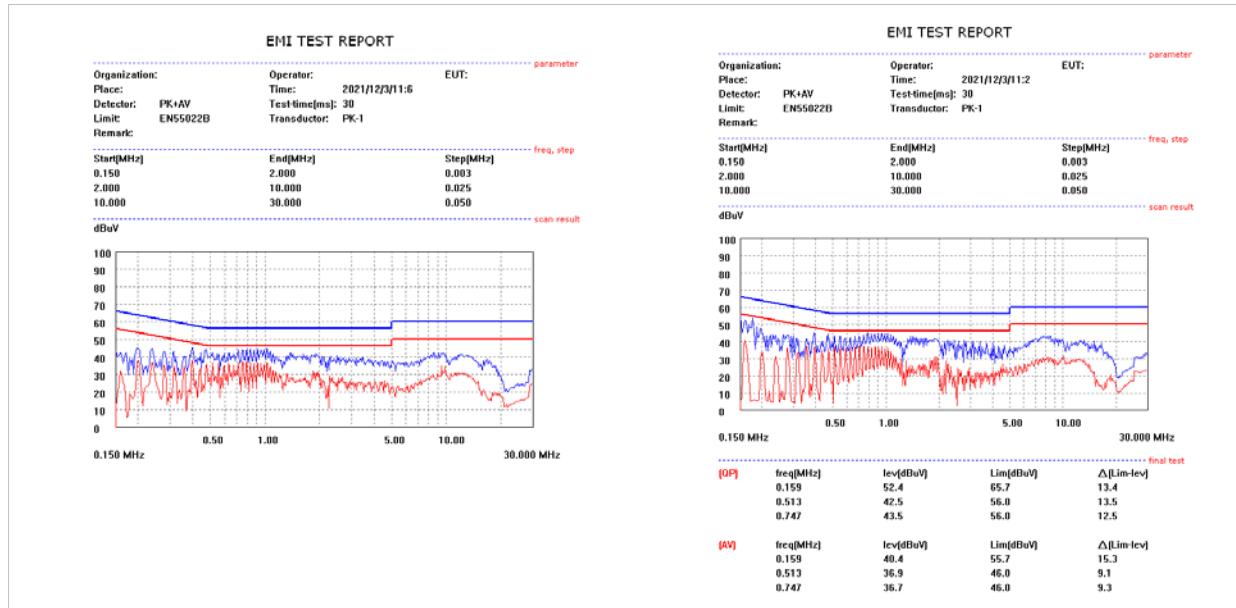

3.2 Radiation EMI Test

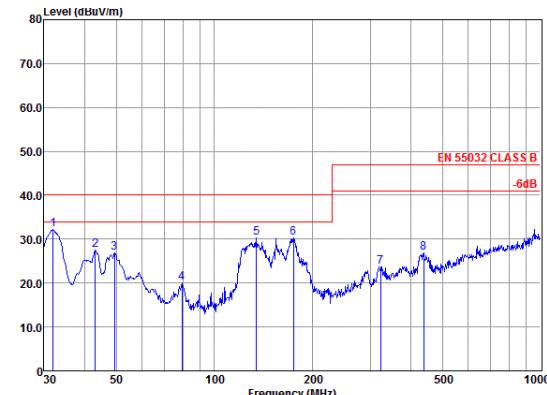

Site	EN 55032 CLASS B VERTICAL									
	EN 55032 CLASS B HORIZONTAL									
Condition										
Project No.	Applicant	EUT	M/N	S/N	Power Supply	Ambient	Test Mode	Test Engineer	Memo	Read
					230V/50Hz	22°C 60%RH		Richard	:	Cable
										Antenna
										Preamp
										Limit
Freq	Level	Loss	Factor	Factor	Line	Level	Over			Remark
MHz	dBuV	dB	dB/m	dB	dBuV/m	dBuV/m	dB			
1	31.95	41.03	0.67	18.15	27.63	40.00	32.22	-7.78	Peak	
2	43.05	34.90	0.76	19.50	27.63	40.00	27.55	-12.45	Peak	
3	49.36	33.86	0.80	19.82	27.63	40.00	26.88	-13.12	Peak	
4	79.52	30.15	1.01	16.58	27.63	40.00	20.14	-19.86	Peak	
5	134.56	37.95	1.31	18.30	27.34	40.00	30.22	-9.78	Peak	
6	174.42	36.36	1.47	19.49	27.12	40.00	30.20	-9.80	Peak	
7	323.32	27.79	2.03	20.88	26.98	47.00	23.72	-23.28	Peak	
8	438.66	29.51	2.33	22.73	27.70	47.00	26.87	-20.13	Peak	

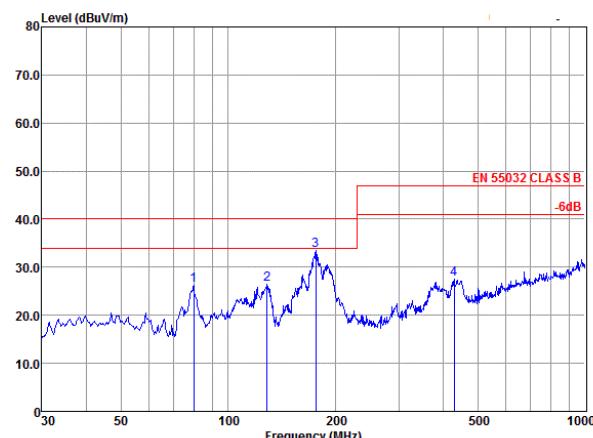

Site	EN 55032 CLASS B HORIZONTAL									
	EN 55032 CLASS B VERTICAL									
Condition										
Project No.	Applicant	EUT	M/N	S/N	Power Supply	Ambient	Test Mode	Test Engineer	Memo	Read
					230V/50Hz	22°C 60%RH		Richard	:	Cable
										Antenna
										Preamp
										Limit
Freq	Level	Loss	Factor	Factor	Line	Level	Over			Remark
MHz	dBuV	dB	dB/m	dB	dBuV/m	dBuV/m	dB			
1	80.08	36.29	1.01	16.60	27.60	40.00	26.30	-13.70	Peak	
2	128.56	34.64	1.27	17.85	27.38	40.00	26.38	-13.62	Peak	
3	175.65	39.84	1.48	19.26	27.11	40.00	33.47	-6.53	Peak	
4	429.52	30.39	2.32	22.40	27.65	47.00	27.46	-19.54	Peak	

Disclaimer

On-Bright Electronics reserves the right to make corrections, modifications, enhancements, improvements, and other changes to its documents, products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete.

This document is under copy right protection. None of any part of document could be reproduced, modified without prior written approval from On-Bright Electronics.